



HANDS-FREE TWO-WAY

VeriFact[®] 525

The VeriFact 525 is a **hands-free** analog two-way speaker microphone with Echo cancellation and full-duplex technology allowing for two-way communication with high-fidelity sound. The unit contains a built-in microphone and a 2.5" speaker for accomplishing bi-directional audio. The VeriFact 525 uses terminal blocks to ease the connection directly to IP cameras and encoders that feature two-way, line level audio.

Upgraded Features:

- Handsfree analog two-way speaker microphone
- Sturdy ABS plastic housing
- Speaker gain can be adjusted using the variable potentiometer
- Microphone and speaker gain adjustable on IP camera user interface adjustment
- Echo cancellation allowing for full duplex operations
- Omni-directional microphone and 2.5" speaker
- UL listed
- Compatible with most IP cameras, DVRs and NVRs
- May be installed up to 1,000' from audio receiving devices



Retail



Education



Commercial



Healthcare



Listed

Louroe.com | (800) 927-6498



LOUROE
ELECTRONICS

World Leader in Audio Monitoring Technology Since 1979




LOUROS ELECTRONICS®

World Leader in Audio Monitoring Technology Since 1979

LOUROS MODEL LE-525 BACK BOX

Speaker output adjustment
Turn Clockwise to increase
speaker output

+12VDC, 1.5A power required
(AD-1 power supply included)

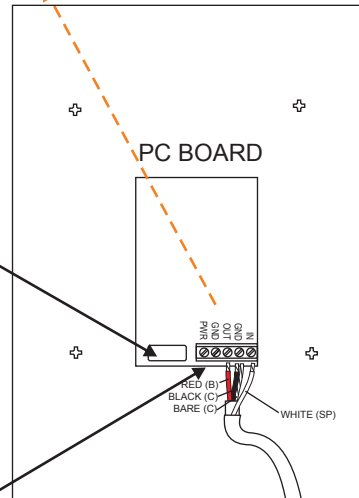

WIRING REQUIREMENTS

- 3 Conductor consisting of:
 - 2 Conductor **shielded**, 20 gauge with 22 gauge drain
 - 1 Conductor **unshielded**, 20 gauge
 - All in the same jacket




(C) BARE
(B) RED
BLACK (C)
WHITE (SP)

TO AUDIO IN OF IP CAMERA, DVR, ETC.


TO AUDIO OUT OF IP CAMERA, DVR, ETC.

NOTE: BLACK AND BARE WIRES ARE COMMON GROUND


3.5mm STEREO CONNECTION

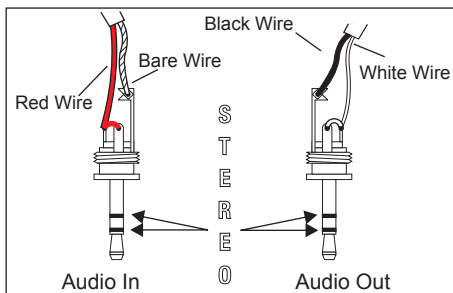

3.5mm MONO CONNECTION

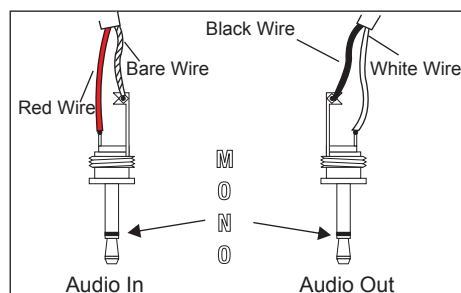

RCA CONNECTION

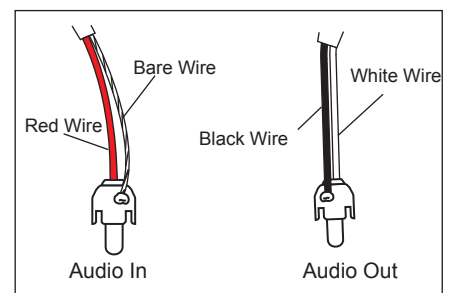

Markets:

The VeriFact 525 is typically used in the medical industry in patient rooms, imaging rooms or speech therapy labs. It provides for communication between medical staff and patient rooms.

Kit Includes:

- VeriFact 525 Speaker/Microphone
- AD-1 12 Vdc Power Supply

Compatible With:

- Compatible with most IP camera, DVRs and NVRs

Case studies available:
louroe.com/casestudies

MANUFACTURED IN THE

