

## VeriFact® DV (LE-069)

**Vandal Resistant** 

The VeriFact® DV (LE-069) is designed for **vandal prone areas**. The vandal resistant faceplate has a louver for microphone protection. In addition, the microphone element is mounted in a rigid recessed housing to prevent damage from foreign objects. The unit fits into a single gang electrical backbox (not included) for ease of installation for ceiling or wall. Flush mounting further enhances vandal resistance. The VeriFact® DV is **omni-directional** and produces line level output.

#### **Features:**


- Flush or surface mount to wall or ceiling
- Tamper resistant stainless-steel faceplate
- Can pick up normal sounds within a 15' radius
- May be located up to 1000' from base station
- Fits into single gang electrical box (not included)
- Sensitivity switch: normal/low

Included in: ASK-4® 101DV



Can be used with MS - 1 (LE - 331) or MS - 1 - ML (LE - 333) Mute Switch






**Remote Monitoring** 









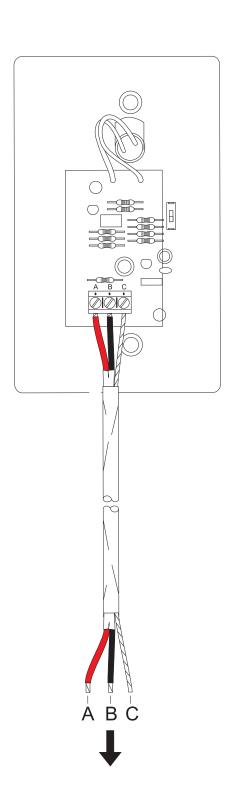

# VeriFact® DV (LE-069)

#### Markets:

The vandal-resistant microphone is designed for correctional, educational and commercial facilities or any area where the potential of vandalism is a concern. It is typically installed in the intake room, interview room and common areas.

#### **Features:**

- High sensitivity to low sound pressure
- Microphone can pick up normal sounds within a 15' radius
- May be located up to 1000' from base station
- Fits into single gang electrical box (not included)
- Flush or surface mount to wall or ceiling
- Sensitivity switch: normal/low
- Tamper resistant stainless steel faceplate with tamperproof screws

### Included in:

ASK-4® 101DV



#### **Compatible With:**

- All Louroe base stations and interfaces and most cameras and recorders that accept a line level audio output
- For IP camera with mic level input refer to the DV-ML

